

## VS Inline Wet Scrubber

The total solution for removing acids and gases from individual fume hood exhaust.



### Highly Effective Removal of Acidic Fumes

- Lateral mixing and turbulent flow ensure clean air emissions
- No packing material means no channeling or performance drop-off
- Consistently high removal efficiency without clogging

### Years of Maintenance-free Performance

- No moving parts extends system lifespan
- Minimal water use reduces cost and equipment use
- Supports hazardous waste minimization under RCRA

### Quick and Easy Custom Installations

- Compact and lightweight for overhead or rooftop placement
- Installs easily above hoods or in ceilings without structural changes
- Inline setup avoids costly ductwork renovations

| Proven Effectiveness           |                       |                       |
|--------------------------------|-----------------------|-----------------------|
| Reagent                        | % of Efficiency (min) | % of Efficiency (max) |
| HF                             | 95                    | 100                   |
| HCl                            | 91                    | 92                    |
| HNO <sub>3</sub>               | 69                    | 78                    |
| H <sub>2</sub> SO <sub>4</sub> | 87                    | 91                    |
| HClO <sub>4</sub>              | 50                    | 57                    |

**Testing Parameters:** For each test, a known volume aliquot of reagent was evaporated on a hotplate and drawn through the fume hood into the Inline Wet Scrubber. The effluent from the Inline Wet Scrubber was then analyzed and the quantity of reagent removed by the Inline Wet Scrubber determined.

# Features Diagram

## Directional Baffles

- Redirects, compresses, and accelerates airflow
- Increases removal rate of contaminants


## Serpentine Mist Emulator

- Captures final water droplets
- Begins to facilitate air acceleration

## Suspended Water Column

- Vortex mixes clean water with contaminated fumes
- Directs droplets with captured contaminants into drain

## Drain Line

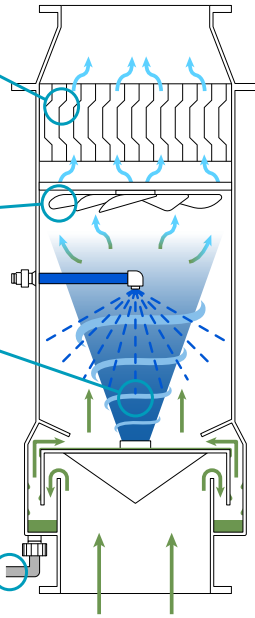

## Metal-free Construction


- Chemically inert to aggressive reagents
- Protects existing metal ductwork
- Polypropylene and PVC options

## Static Operation

- No moving parts to replace
- No need to plug in
- Enjoys a long maintenance-free lifetime

## Quick and Easy Installation

- Installs directly into existing ducting systems
- Two-hour average installation time
- Prevents a full renovation of building exhaust

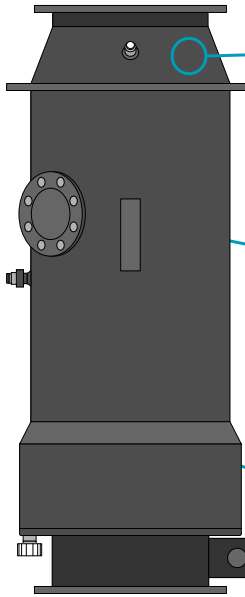

Multiple configurations available, including large outdoor industrial scrubbers, inert ducting, exhaust fans, and more

|                                 | VS-8   | VS-10-PP   | VS-11-PP   | VS-12-PP   |
|---------------------------------|--|--|--|--|
| <b>Dimensions H x W (cm)</b>    | 98.43 x 34.54  | 113.72 x 43.18   | 120.22 x 47.63   | 128.91 x 51.82   |
| <b>Inlet / Outlet (cm)</b>      | 20.73 x 20.73  | 25.91 x 25.91  | 28.58 x 28.58  | 31.09 x 31.09  |
| <b>Operating Weight (kg)</b>    | 12.25  | 20.87  | 26.31  | 29.03  |
| <b>Water Requirement (L/hr)</b> | 30.28  | 30.28  | 30.28  | 30.28  |
| <b>Water Pressure</b>           | Min 35 PSI   | Min 35 PSI   | Min 35 PSI   | Min 35 PSI   |
| <b>Air Volume (min/max)</b>     | 6.80 m <sup>3</sup> /min /<br>7.08 m <sup>3</sup> /min | 16.42 m <sup>3</sup> /min /<br>20.39 m <sup>3</sup> /min | 19.68 m <sup>3</sup> /min /<br>24.78 m <sup>3</sup> /min | 25.20 m <sup>3</sup> /min /<br>28.32 m <sup>3</sup> /min |
| <b>Operating Temp (min/max)</b> | 1.67 °C / 48.89 °C                                     | 1.67 °C / 48.89 °C                                       | 1.67 °C / 48.89 °C                                       | 1.67 °C / 48.89 °C                                       |

|                                 | VS-13-PP   | VS-15-PP   | VS-16-PP   | VS-18-PP   | VS-20-PP   |
|---------------------------------|--|--|--|--|--|
| <b>Dimensions H x W (cm)</b>    | 140.28 x 56.39   | 156.85 x 64.77   | 164.34 x 67.69   | 181.69 x 76.20   | 199.39 x 86.26   |
| <b>Inlet / Outlet (cm)</b>      | 33.83 x 33.83  | 38.86 x 38.86  | 40.64 x 40.64  | 45.72 x 45.72  | 51.82 x 51.82  |
| <b>Operating Weight (kg)</b>    | 31.30  | 35.38  | 45.36  | 56.70  | 58.97  |
| <b>Water Requirement (L/hr)</b> | 30.28  | 60.57  | 60.57  | 60.57  | 60.57  |
| <b>Water Pressure</b>           | Min 35 PSI   | Min 35 PSI   | Min 35 PSI   | Min 35 PSI   | Min 35 PSI   |
| <b>Air Volume (min/max)</b>     | 32.00 m <sup>3</sup> /min /<br>40.07 m <sup>3</sup> /min | 45.02 m <sup>3</sup> /min /<br>49.13 m <sup>3</sup> /min | 48.85 m <sup>3</sup> /min /<br>55.21 m <sup>3</sup> /min | 55.21 m <sup>3</sup> /min /<br>67.96 m <sup>3</sup> /min | 67.96 m <sup>3</sup> /min /<br>86.40 m <sup>3</sup> /min |
| <b>Operating Temp (min/max)</b> | 1.67 °C /<br>48.89 °C                                    | 1.67 °C /<br>48.89 °C                                    | 1.67 °C /<br>48.89 °C                                    | 1.67 °C /<br>48.89 °C                                    | 1.67 °C /<br>48.89 °C                                    |



© Elemental Scientific | 7277 World Communications Drive | Omaha, NE 68122  
Tel: 1-402-991-7800 | sales@icpms.com | www.icpms.com